


### FEATURES AND BENEFITS

- Low power loss, high efficiency operation
- Low forward voltage drop
- Fast switching capability
- High forward surge capability
- Excellent High Temperature Stability

### MECHANICAL DATA

- Epoxy : UL94 V-0 rated flame retardant
- Case: TO-220AB-3L Package
- Terminals: Matte Tin annealed over copper
- Weight: Approximated 2.03 grams

Primary Characteristic	
$I_O$	2X20A
$V_{RRM}$	100V
$I_{FSM}$	350A
$V_F$ Typica=10A, $T_J=125^\circ\text{C}$	0.50V
$T_{Jmax}$	175°C

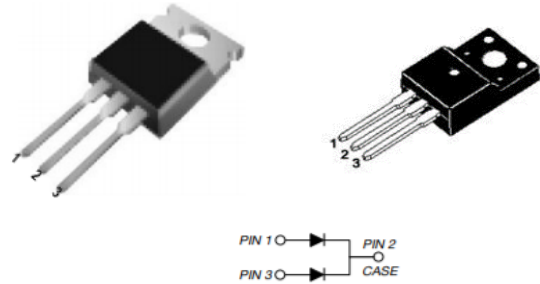

Maximum Ratings ( $T_a=25^\circ\text{C}$ unless otherwise specified)			
Characteristics	Symbol	Value	Unit
Peak Repetitive Reverse Voltage	$V_{RRM}$	100	V
Working Peak Reverse Voltage	$V_{RWM}$	100	V
DC Blocking Voltage	$V_{DC}$	100	V
RMS Reverse Voltage	$V_{RMS}$	70	V
Average Forward Rectified Current (per diode)	$I_O$	20	Amps
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	$I_{FSM}$	350	Amps

Electrical Characteristics ( $T_a=25^\circ\text{C}$ unless otherwise specified)						
Characteristics			Symbol	Typ.	Max.	Unit
Forward Voltage Drop <sup>1)</sup>	$I_F=10\text{A}$	$T_a=25^\circ\text{C}$	$V_F$	0.55	0.59	V
	$I_F=20\text{A}$	$T_a=25^\circ\text{C}$	$V_F$	0.68	0.72	V
	$I_F=10\text{A}$	$T_a=125^\circ\text{C}$	$V_F$	0.50	0.54	V
	$I_F=20\text{A}$	$T_a=125^\circ\text{C}$	$V_F$	0.60	0.64	V
Reverse Current <sup>2)</sup>	$V_R=100\text{V}$	$T_a=25^\circ\text{C}$	$I_R$	10	30	$\mu\text{A}$
	$V_R=100\text{V}$	$T_a=125^\circ\text{C}$	$I_R$	6	18	mA

THERMAL CHARACTERISTICS ( $T_A = 25^\circ\text{C}$ unless otherwise noted)				
Characteristics		Symbol	Value	Unit
Typical Thermal Resistance, junction to case	TO-220AB	$R_{\theta JC}$	2.8	$^\circ\text{C/W}$
Typical Thermal Resistance, junction to case	ITO-220AB	$R_{\theta JC}$	4.0	$^\circ\text{C/W}$
Operating Temperature Range ( in DC Mode)		$T_J$	-65 to +175	$^\circ\text{C}$
Storage Temperature Range		$T_{STG}$	-65 to +150	$^\circ\text{C}$


Notes (1): Pulse test: 300 $\mu\text{s}$  pulse width, 1% duty cycle.

Notes (2): Pulse width  $\leq 40\text{ms}$


Notes (3): FR-4 PCB, 2oz copper. Minimum recommended pad layout

## RATINGS AND CHARACTERISTICS CURVES


**Fig 1. Typical Forward Characteristics**

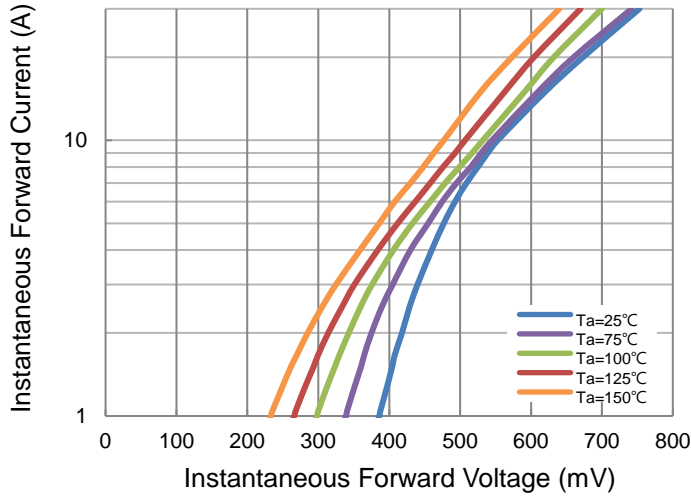

**Fig 2. Typical Reverse Characteristics**

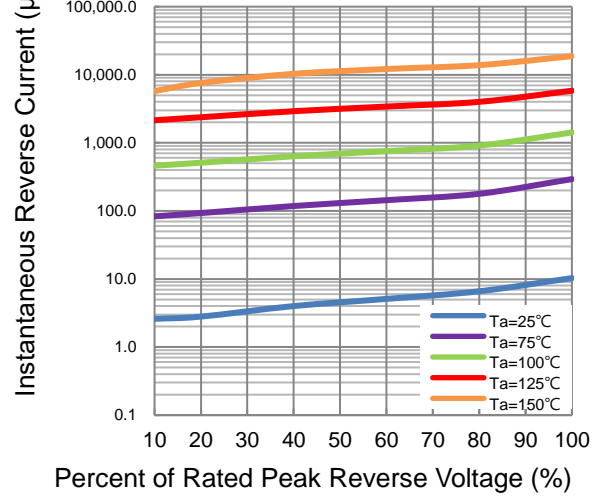

**Fig 3. Typical Forward Current Derating Curve**

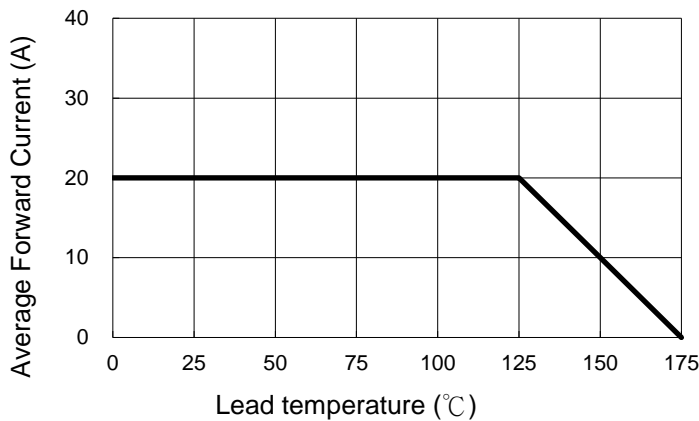

**Fig 4. Non-repetitive Forward Surge Current**

